




TOP VIEW

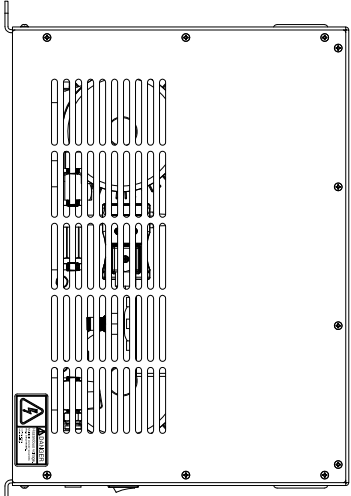

FRONT VIEW

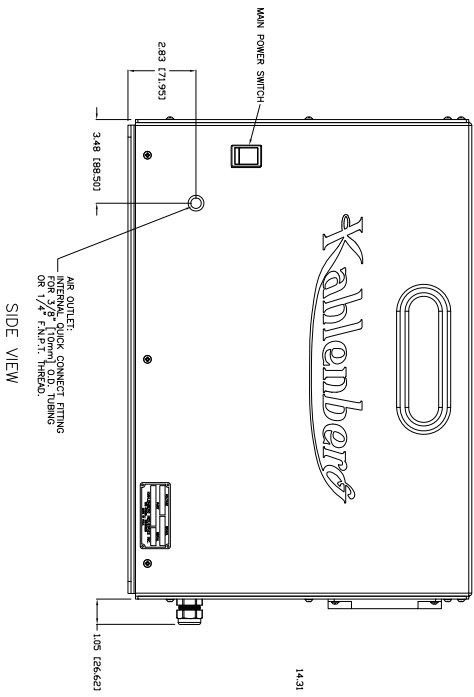

SIDE VIEW

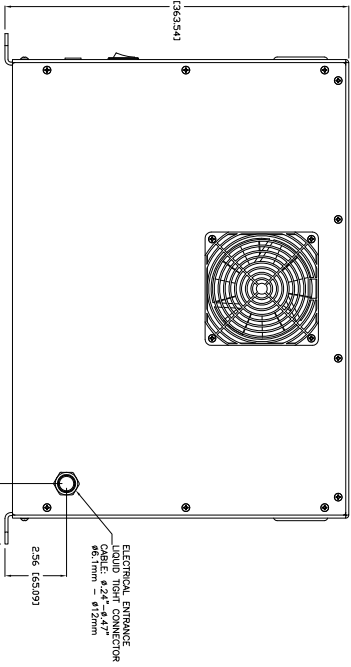


REAR VIEW

TECHNICAL DATA

Continuous Duty, Vibration Isolated,  
Thermally Protected, Oil-less, Air Cooled  
Output: 6 C.F.M. FAD @ 100 p.s.i.,  
(170 l/m @ 8 bar)  
Max. Pressure: 120 p.s.i. (8 bar)  
Voltage Req'd: 120 VAC, 60Hz or 230 VAC, 50/60 Hz  
Max. Current: 6.8A @ 230 Volts  
13A @ 120 Volts  
Enclosure: Ingress Protection: IP21  
Materials: 5052 Aluminum, 316 Stainless Steel  
Operating Temperature Range: 32-104 deg. F., (0-40C)  
Operating Noise Level: 64dB(A) @ 1 Meter  
Weight: 66 lbs., (30kg)  
Finish: TGIC Sky White Powdercoat

REV.	BY	DATE	DESCRIPTION	APP'D.
A	ZN	09/23/22	REMOVED AUDIBLE FAN ALARM	EMK

Ref. Pats List: 3-7302  
© Copyright Kahlenberg Inc. Inc. 2010



**Kahlenberg**  
TWO RIVERS, WISCONSIN 54241

**OUTLINE DIMENSIONS**  
**KC-6 OIL-LESS**  
**AIR COMPRESSOR**

DR.	DATE	CKD.	SCALE	DRWG. NO.	REV.
ZIN	10/23/18	EMK	N.T.S.	3-7301	A