



- Hose** : MARINE WET EXHAUST HOSE (CORRUGATED)
- Application** : Hoses are to be used for as flexible tubing in marine wet exhaust systems on yachts and small craft
- Features** : Exhaust gases and fuel residues resistant  
 Flush and smooth inside to reduce engine back pressure  
 Small bending radius
- Lining** : Exhaust gas, salt water resistant, black, EPDM rubber
- Reinforcement** : Synthetic textile fabric and steel helix wire embedded between the layers.
- Cover** : Heat, salt water, ozone and abrasion resistant, black, corrugated, EPDM rubber.
- Temperature** : Suitable for use in the range - 30 to + 100° Celsius (- 22 to + 212° Fahrenheit)  
 (intermittent to + 115 °C, 239 °F)
- Relevant Standard** : SAE J 2006 R2
- Classification** : Lloyds approval  
 RINA approval (ISO 13363) on request

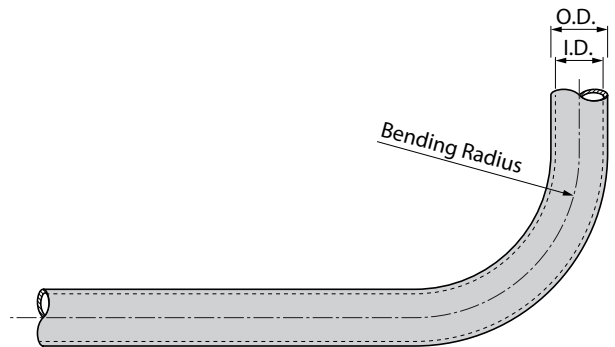

Code	I.D.		O.D.	Steel Wire		Working Pressure		Burst Pressure		Bending Radius		Force	Weight	
	mm	inch		Diam.	Pitch	bar	psi	bar	psi	mm	inch		N	kg/m
			mm	mm	mm	bar	psi	bar	psi	mm	inch	N	kg/m	lbs/ft
SLANG30	30 ±1.0	1 3/16	38	1.0	8	4	58	12	175	45	1 3/4	4.0	0.55	0.37
SLANG40	40 ±1.0	1 9/16	48	1.5	9	4	58	12	175	60	2 3/8	3.2	0.79	0.53
SLANG45	45 ±1.0	1 3/4	53	1.5	9	4	58	12	175	68	2 3/4	4.0	0.88	0.59
SLANG50	51 ±1.2	2	59	1.5	9	4	58	12	175	77	3 1/16	4.0	1.0	0.67
SLANG57	57 ±1.2	2 1/4	65	1.5	9	3.3	48	10	145	86	3 3/8	4.3	1.1	0.74
SLANG60	60 ±1.2	2 3/8	68	1.5	9	3.3	48	10	145	90	3 9/16	4.0	1.2	0.81
SLANG65	65 ±1.2	2 9/16	73	1.5	9	3.3	48	10	145	98	3 7/8	3.5	1.3	0.87
SLANG75	76 ±1.4	3	84	1.5	10	3.3	48	10	145	114	4 1/2	3.5	1.4	0.94
SLANG90	90 ±1.5	3 1/2	98	2.0	13	2	29	6	87	135	4 5/16	3.5	1.9	1.28
SLANG100	102 ±1.6	4	110	2.0	12	2	29	6	87	153	6	6.0	2.3	1.55

Code	I.D.		O.D	Steel Wire		Working Pressure		Burst Pressure		Bending Radius		Force	Weight	
				Diam.	Pitch									
	mm	inch	mm	mm	mm	bar	psi	bar	psi	mm	inch	N	kg/m	lbs/ft
SLANG110	110 ±1.6	4 11/32	119	2.5	14	2	29	6	87	165	6 1/2	5.0	2.8	1.88
SLANG125	127 ±1.6	5	137	2.5	14	2	29	6	87	191	7 1/2	5.0	3.3	2.2
SLANG150	152 ±2.0	6	163	3.0	14	2	29	6	87	228	9	6.0	4.4	3.0
SLANG200	203 ±2.5	8	218	4.0	24	2	29	6	87	406	16	20	6.8	4.6
SLANG250	254	10 ±3.0	270	3.5	25	2	29	6	87	508	20	30	8.5	5.7
SLANG300	305	12 ±3.0	323	4.0	31	2	29	6	87	606	24	60	10.8	7.3

Identification:

 <b>EXHAUST HOSE - I.D. 60 mm - 2 3/8"</b> <div style="float: right; font-size: small;"> Lloyd's Register Type Approval  SAE J2006 R2 Certified </div>
<p>Yellow ribbon over full length of hose  0.5 meter Mark, Hose type and dimension repeated every 0.5 meter</p>