DC connectors

Item #: 12VRC & 12VRC.OEM

Description
Sealink receptacle, 12 volt

Electrical Specifications
12V, 15A

Terminals:
NEMA .250" quick connect tabs.

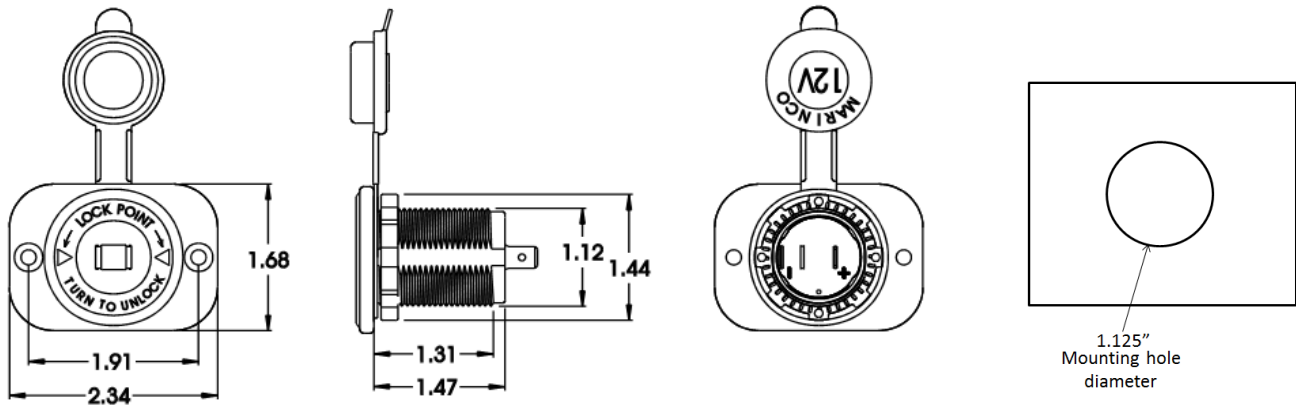**Material Specifications**
Housing Material: Nylon
Contact Material: Brass
Cover: Molded flexible vinyl

Mechanical Specification
Mounting: Provision for two mounting means.
Front mount - provided with mounting plate and black coated stainless steel #6 tapping screws.
Rear mount - provided with non-metallic 1-1/8 X 16 UN locknut.
Mounting plate not included with 12VRC.OEM

Overall Design: Provided with vinyl cap to seal receptacle when not in use. Sealing ring on Marinco Sealink plug (cat. no. 12VPG) provides weather seal while in use. Receptacle provided with recesses to lock Marinco Sealink plug to prevent inadvertent disconnection; disengages when plug is rotated 30°.

Dimensions shown in inches.

1.68
1.91
2.34
1.12
1.44
1.31
1.47
12V
MARINCO
1.125"
Mounting hole
diameter

MARINCO